ProMAXX
Professional Workspace System

Congratulations ! On the purchase of your Pro-Maxx Cabinet Dolly. (Some assembly required.)

Model Number
CBD1836

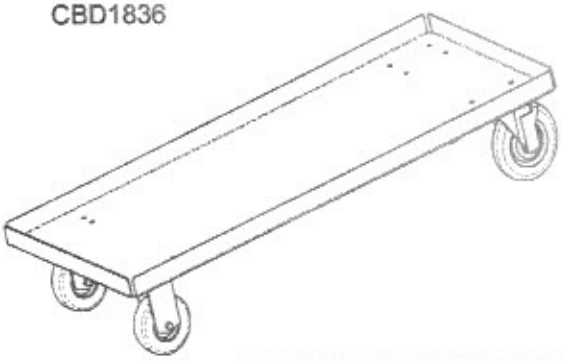

Swivel Caster W / Brake (2)

Swivel Caster (2)

1/4-20 x 5/8"
Nuts, Bolts & Washers (16)

18" x 36" Base

*** IMPORTANT SAFETY INSTRUCTIONS PLEASE READ FIRST ***

When moving the cabinets on the dolly, always push from the sides of the cabinet. **NEVER** push from the front, back, or top. This can cause a **"tipping"** hazard, which can result in a serious injury to yourself or others. **NEVER** pull the cabinet during movement, push the cabinet to the location necessary.

Always move the cabinet over a flat level surface. Rough surfaces cause the cabinet to vibrate, which causes the cabinet's load to increase in weight, or again may cause a **"tipping"** hazard which can result in a serious injury to yourself or others. Always make sure when moving the cabinet the doors are closed and locked. Doors may open and spill the contents inside. Also after movement, carefully open the doors. It is possible that the cabinets contents may have shifted, and may fall from the cabinet.

Do not use this dolly for anything other than the manufactures intended purpose. **NEVER** stand on or ride on the cabinet. Use the caster brakes to hold the dolly in position when it is stationary. **DO NOT OVERLOAD**. Make sure items are evenly distributed on each shelf, and that the heavier items are placed at the bottom. Do not store any items on the top of the cabinet during movement, this may cause a **"falling"** hazard that can injure yourself or others.

Assembly Instructions

This instruction sheet was designed to help you assemble the dolly in the proper way, please follow them using all parts and fasteners provided. Any alteration or deviation from these instructions can result in dolly and cabinet failure. After assembly is complete, make sure the dolly is placed on a level surface as this may effect the performance of the unit.

Place the dolly base on it's side and align the brake and swivel casters with the proper holes on the dolly base **(see figure 1).** Install the 1/4-20 x 5/8" bolts through the dolly base and into the holes of the casters. Apply the washers and nuts and tighten appropriately **(see figure 2).** Turn the dolly right side up, lock the caster brakes and place the cabinet into the dolly.

Figure 1

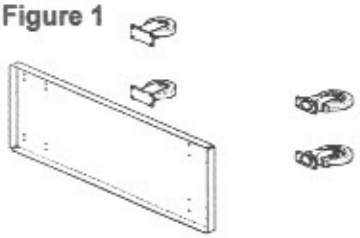

Figure 2

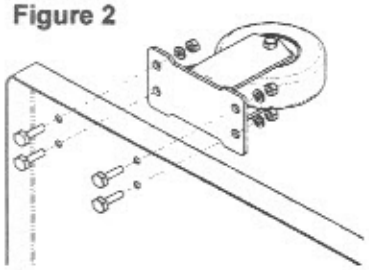

Should you have any comments, damage, missing parts, or problems with assembly of this unit please feel free to contact our Pro-Maxx manufacturing facility at, (773) 475-3000 and request customer service. We can also be reached on the internet at the following email address , customerservice@promaxxsystem.com

To obtain replacement parts, please provide the following information :

- Model # - Part # & Description - Location Purchased - Date Purchased

Pro-Maxx Manufacturing
4400 South Packers Avenue
Chicago, IL 60609
www. promaxxsystem.com